




EASYENTRY



RFM5500

FEATURES

- Reader proximity MIFARE
- Wiegand output 26 bits, RS232
- With led and beeper
- Reading range 10 cm
- Reading time 30ms
- Reading and writing
- Power supply DC9 ~ 12V
- Operating frequency 13.56 MHz
- ISO14443A contactless interface
- Compatible cards, reading and writing, Mifare 1K, 4K
- ultralight, Mifare Pro / Prox, Desfire and ISO14443A cards
- Reader proximity MIFARE UID
- With led and beeper
- Reading range 10 cm
- Protection class IP65
- Connecting 45 cm, pigtail connector or screw terminal plug
- Power consumption 150mA
- Operating Temperature -25 ° C +65 ° C
- Storage Temperature -25 ° C to +70 ° C
- Dimensions 126 x 68 x 19 mm

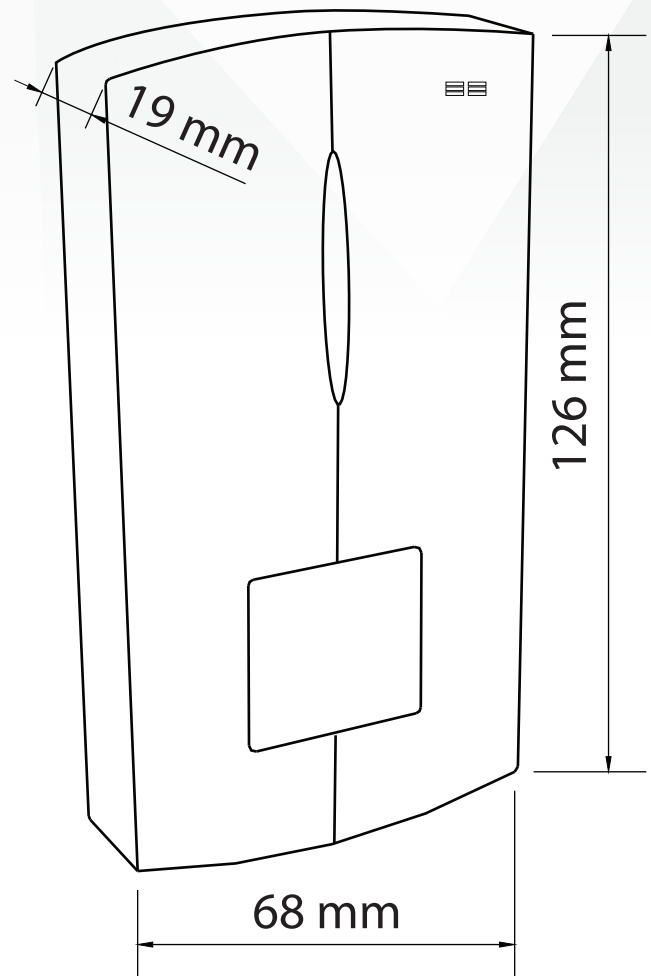

ACCESSORIES

- User manual

